

## Declaration of Performance

Ref.: Regulation (EU) 305/2011

DoP ID: **DC210\_DOP**

1. Unique identification code of the product type	<b>DC210 Overhead door closer</b>
2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4) of the CPR	<b>Door closing devices</b>
3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer	<b>For use on fire rated single leaf and double leaf doors. Standard door mount pull side application.</b>
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11	<b>Serrature Meroni S.p.A.</b> Via Valsorda S.P.40 22044 Inverigo (CO) Italy
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12	<b>N/A</b>
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in CPR, Annex V	<b>System 1</b>
7. In case of the declaration of performance concerning a construction product covered by a harmonized standard	<b>EN 1154: 1996 +A1:2002</b>
8. Notified Certification Body	<b>Warrington Certification Limited, No 1121</b>
9. European Technical Assessment	<b>N/A</b>

**SERRATURE MERONI S.p.A.**

Via Valsorda, S.P. 40  
22044 Inverigo  
Como, Italia  
www.serraturemeroni.it

**Capitale sociale** € 1.250.000,00 i.v.  
**P.I.** IT 08243260018  
**C.F.** IT 08243260018  
**REA** CO-323211

**E:** meroni@serme.it  
**Pec:** amministrazione@pec.serme.it  
**T:** +39 031 6949301  
**F:** +39 031 698707

## Declaration of Performance

Ref.: Regulation (EU) 305/2011

### 10. Declared performances

Essential characteristic	Performance	Harmonized technical specification
Self-closing	Closing moment	Pass Size 2 to 4
	Opening moment	Pass Size 2 to 4
	Efficiency	>50% Size 2 >60% Size 4
	Closing time	Pass
	Angles of operation	Grade 4 (180°)
	Overload performance	Pass
	Temperature dependence	-15°C to +40°C
	Fluid leakage	Pass
	Damage	Pass
	Latch control	Pass
	Fire/smoke door suitability	Pass
Durability of self-closing	Durability	500,000 test cycles
	Corrosion	Grade 3 (96 hours)
Dangerous substances	Substances of very high concerns >threshold values	


EN 1154:1996/A1:2002/A2:2006

The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 10.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Inverigo, 17<sup>th</sup> November 2016

Signed for and on behalf of  
SERRATURE MERONI S.p.A.

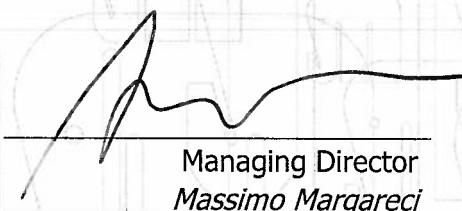

Managing Director  
*Massimo Margareci*

SERRATURE MERONI S.p.A.

Via Valsorda, S.P. 40  
22044 Inverigo  
Como, Italia  
www.serraturemeroni.it

Capitale sociale € 1.250.000,00 i.v.  
P.I. IT 08243260018  
C.F. IT 08243260018  
REA CO-323211

E: meroni@serme.it  
Pec: amministrazione@pec.serme.it  
T: +39 031 6949301  
F: +39 031 698707